


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 8 TOWNSHIP 16 RANGE 4
 DATE: --4-8-98-- 8-1-04
 PARTY CHIEF: Wilcoxon
 CREW: _____
 TYPE OF MARKER: Harrison
 METHOD OF ESTABLISHMENT: County: 3-10-92

IN. S.P.C. E ZONE, NAD 83
 NAME: 16040804
 N: 510697.5360(m)
 E: 61029.1870(m)

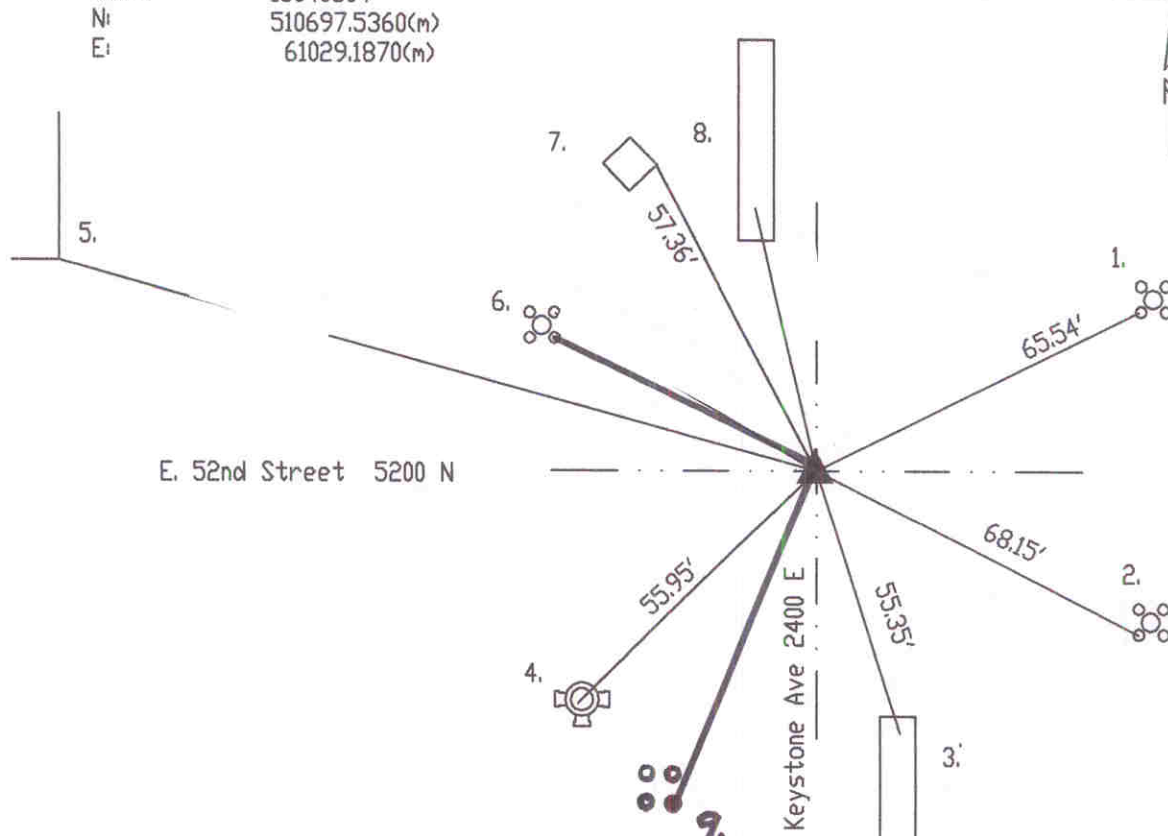

Original post set 1820 by Hendricks with witnesses: 8" maple N 48 W 39 links, 12" elm S 32 E 13 links per Marion County Atlas pg. 11. Culley called stone per Washington Township Legal Survey Book pg. 23. Thompson 6-10-47 called 2" galvanized washer. Monroe 11-4-60 called 1/2" metal pin. Schmidt 12-20-61 called brass plug. Wilcoxon 11-21-79 called brass plug. Gries 8-20-87 called same. Excavated 3-10-92 by Wilcoxon and set Harrison. Re-tied 4-8-98.

HC640804

REF.	DISTANCE	DESCRIPTION
1.	65.54'	Cut 'x' SW bolt
2.	68.15'	Cut 'x' SW bolt
3.	55.35'	Cut 'x' N-end median
4.	55.95'	Top nut
5.	122.01'	SW brick bldg.
6.	54.47'	Cut 'x' X bolt (SE bolt)
7.	57.36'	Easterly corner conc. signal box
8.	50.61'	Cut 'x' S-end median
9.	60.77'	Cut 'x' SE bolt of aluminum pole base